



BKHD-1170NP-12-4L Motherboard

VER 1.1

Copyright Notice

©2025 Beikong Industrial Control. All rights reserved.

All trademarks, service marks, company names, and logos referenced in this manual are the property of their respective owners. Any use of these trademarks, service marks, company names, and logos without express written permission from Beikong Industrial Control or the respective trademark owners is strictly prohibited.

Responsibility Statement

This user manual and its contents, including text, images, charts, and other materials, are protected by copyright law and are the property of Beikong Industrial Control. Please be advised that without the written permission of Beikong Industrial Control, the manual may not be copied, distributed, displayed, modified, created as a derivative work, transmitted, or publicly performed or displayed in any way or form.

Beikong Industrial Control reserves the right to modify the product specifications, features, designs, or any related information mentioned in this user manual at any time without prior notice. Please be advised that any such modifications will take effect without further notice.

Any reproduction, modification, reprinting, transmission, or publication of the contents of this manual in any form without prior written permission from Beikong Industrial Control is strictly prohibited. Any violation of this statement may result in legal action and damages.

Safety Guide

To ensure optimal use of Beikong products, please review the user manual in its entirety. Before reviewing product-specific information, we kindly request that you carefully read the safety instructions.

Product Version Identification


The product version number can be found on the motherboard, where X.X represents a number. For example, if the version is indicated as [VER1.0], it signifies that the current version of the motherboard is 1.0. The BIOS interface homepage provides information such as [XXXXNP-XXXX], which denotes the BIOS version number utilized by the current product. When updating the motherboard's BIOS, driver, or referencing other technical documents, please refer to the product version label for the most up-to-date information.



Catalog

| | |
|---|----|
| Copyright Notice | 1 |
| Responsibility Statement | 1 |
| Safety Guide | 1 |
| Product Version Identification | 1 |
| Product Images | 3 |
| Product Profile | 5 |
| Motherboard Specifications | 6 |
| Motherboard Installation | 7 |
| Memory Installation | 8 |
| Motherboard Interface & Pin Description | 9 |
| Jumper Setting | 12 |
| CMOS Content Clear Setting (JCMOS) | 12 |
| Power-on Jumper (Auto_PWR ON) | 12 |
| Motherboard Pin Definition | 13 |
| SATA Data | 13 |
| SATA PWR | 13 |
| Serial Port (COM) | 14 |
| JP1 Settings | 14 |
| JP3, JP4 Settings | 15 |
| Front panel pin: F_PANEL | 16 |
| Processor cooling fan power socket: CPU_FAN | 16 |
| System cooling fan power socket: SYS_FAN | 16 |
| SIM card slot (SIMB) | 17 |
| BIOS User Guide | 18 |
| BIOS Description | 18 |
| BIOS Settings | 19 |
| Common fault analysis and solutions | 20 |
| Useful Links | 21 |

Product Images

Please be advised that products manufactured in different batches may exhibit slight variations in appearance. To ensure the most accurate representation, please refer to the actual received goods.

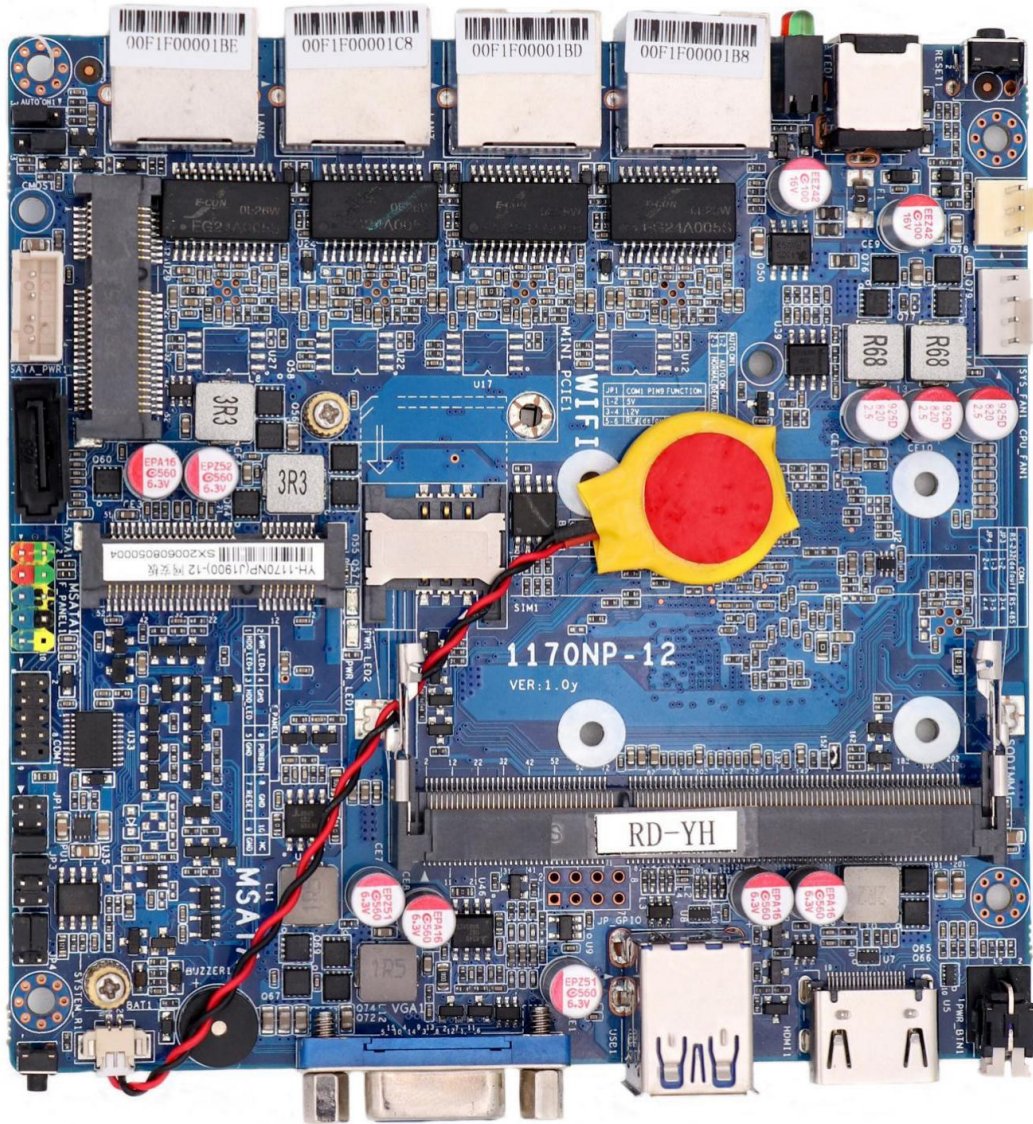

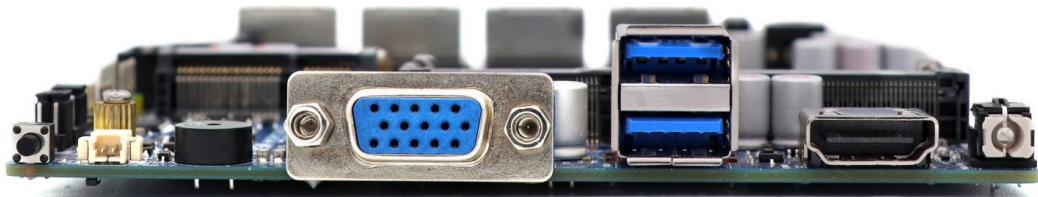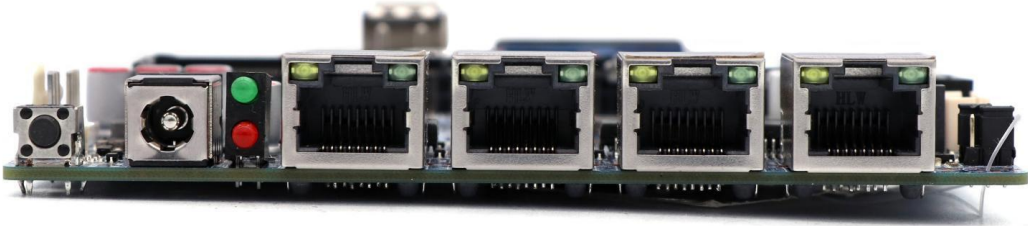

Product Profile

The BKHD-1170NP-12-4L is an ultra-compact embedded industrial motherboard designed based on the Intel Bay Trail platform, featuring a compact 120×120mm size. This motherboard integrates four Gigabit Ethernet ports, supports DDR3L memory, and boasts wide operating temperature range. With its excellent energy efficiency, compact design, and reliable network performance, this product is an ideal solution for building space-constrained industrial control, network equipment, and embedded applications.

Main features:

High-efficiency, low-power platform: Utilizes Intel Bay Trail series low-power processors with excellent thermal design power (TDP), supports DDR3L SO-DIMM low-voltage memory up to 8GB 1333MHz, and features optimized overall power consumption, suitable for long-term uninterrupted operation.

Stable network connectivity: Onboard four Gigabit Ethernet ports, employing Intel I211/I210 network controllers, ensure stable and reliable data transmission. The multi-port design meets the needs of network offloading, gateway, and other applications.

Compact industrial design: Nano-ITX compact form factor maximizes installation space savings, supports a wide operating temperature range, adapts to harsh environments, provides a comprehensive cooling solution, and includes pre-installed CPU and system fan headers.

Rich interface configuration: Dual display output ports for compatibility with various debugging devices, dual storage interfaces to meet basic storage needs, mPCIe expansion interface to support wireless communication modules, and pre-installed COM headers for easy connection to legacy devices.

Motherboard Specifications

| | | |
|------------------------|--------------------|--|
| Processor | Product Collection | Products formerly Bay Trail |
| | Sockets Supported | FCBGA1170 |
| Memory specifications | Memory Type | DDR3L SO-DIMM (1.35V Low Voltage) |
| | Maximum Capacity | 8GB |
| | Maximum Frequency | 1333 MHz |
| Storage specifications | SATA | 1*SATA 2.0 (3Gb/s) |
| | mSATA | 1*mSATA |
| Network features | Ethernet | 4*1GbE |
| | Controller | 4*Intel I211/I210 |
| Extension interface | mPCIe | 1*mPCIe |
| Display functions | Port | 1*VGA/1*HD |
| | Chip | Intel HD Graphics |
| Backplane I/O | USB | 2*USB-A 3.0 |
| | Display | 1*VGA/1*HD |
| | Ethernet | 4*RJ45 |
| | Button | 1*Restart Button, 1*SYS Restart Button, 1*Power Button |
| | Power supply | 1*Jack DC 5.5/2.5mm |
| Onboard I/O | SATA | 1*SATA Data connector/1*SATA Power socket |
| | SIM | 1*SIM Card slots |
| | Fan | 1*CPU fan power socket, 1*System fan power socket |
| | Pins | 1*F_PANEL 1*J_COM |
| Power supply mode | DC | 12V |
| Motherboard size | Specification | 120*120 (mm) |
| Work Environment | Temperature | -20~55°C |
| | Humidity | 5%~90% (Relative humidity, no condensation) |


Motherboard Installation

Safety Note

- Please do not remove the serial number and agent warranty sticker from the motherboard prior to installation. Doing so may affect the product's warranty recognition standard.
- Prior to installing or removing the motherboard or other hardware devices, please ensure that the power is turned off and the power cord is unplugged from the socket.
- When installing additional hardware devices on the motherboard interfaces, please ensure that the connectors and sockets are securely fastened.
- When handling the motherboard, please avoid contact with the metal wiring components to prevent the risk of short circuits.
- It is recommended that an anti-static wrist strap be worn when handling the motherboard, central processing unit (CPU), or memory. In the absence of an anti-static wrist strap, it is advisable to ensure that your hands are dry and to touch a metal object first in order to eliminate static electricity.
- Before installing the motherboard, we kindly request that place it on an antistatic mat or in an antistatic bag.
- Make sure the power adapter is turned off before unplugging the motherboard power connector.
- Before turning on the power, make sure the voltage of the adapter is within the standard voltage range.
- Before turning on the power, make sure all hardware device cables and power cords are properly connected.
- Do not allow the fixing screws to collide with the circuits or parts on the motherboard to avoid damage or malfunction of the motherboard.
- Make sure there are no loose screws or metal parts on the motherboard or inside the computer case before using the unit.
- Please secure the computer host in a stable location before starting the device.
- To prevent system failure, do not place the unit in an environment where the temperature is excessive.
- Turning on the power before installation is complete may damage the motherboard, other equipment, or yourself.
- If you are unfamiliar with how to perform the installation, or if you have any technical problems using this product, please contact a professional technician.

Memory Installation

The motherboard provides DDR3L SODIMM memory slot.

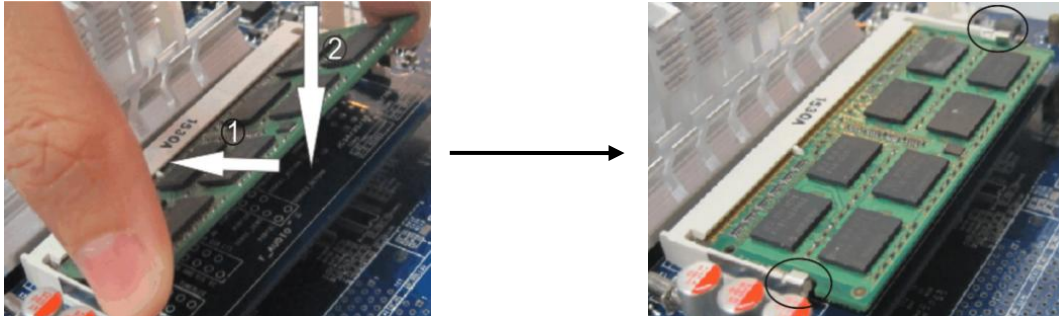

Before installing memory:

1. Please confirm that the memory you purchased is compatible with the specifications supported by this motherboard.
2. Before installing or removing the memory, please make sure that the power of the computer is turned off to avoid damage.
3. The memory design has a foolproof mark. If you insert the memory in the wrong direction, the memory cannot be installed. Please change the direction.


When installing memory:

1. Before installing or removing memory, please turn off the power and unplug the power cord.
2. Carefully hold the two ends of the Memory Stick and do not touch the metal contacts on the Memory Stick.
3. Align the metal contacts of the memory with the memory slot, making sure that the concave hole is aligned with the convex point of the upper slot.
4. Insert the memory into the slot at an angle of 30 degrees, then press the Memory Stick down until you hear a "click," indicating that the memory has been successfully installed and is ready to use. (Note: Do not press the Memory Stick too hard to avoid damaging the memory).
5. To remove the Memory Stick, push out the tabs at both ends of the memory slot simultaneously, and then remove the Memory Stick.

To remove the memory:

Use two fingers to push the latches at either end of the slot outward, the memory will pop up, then remove the memory.

Motherboard Interface & Pin Description

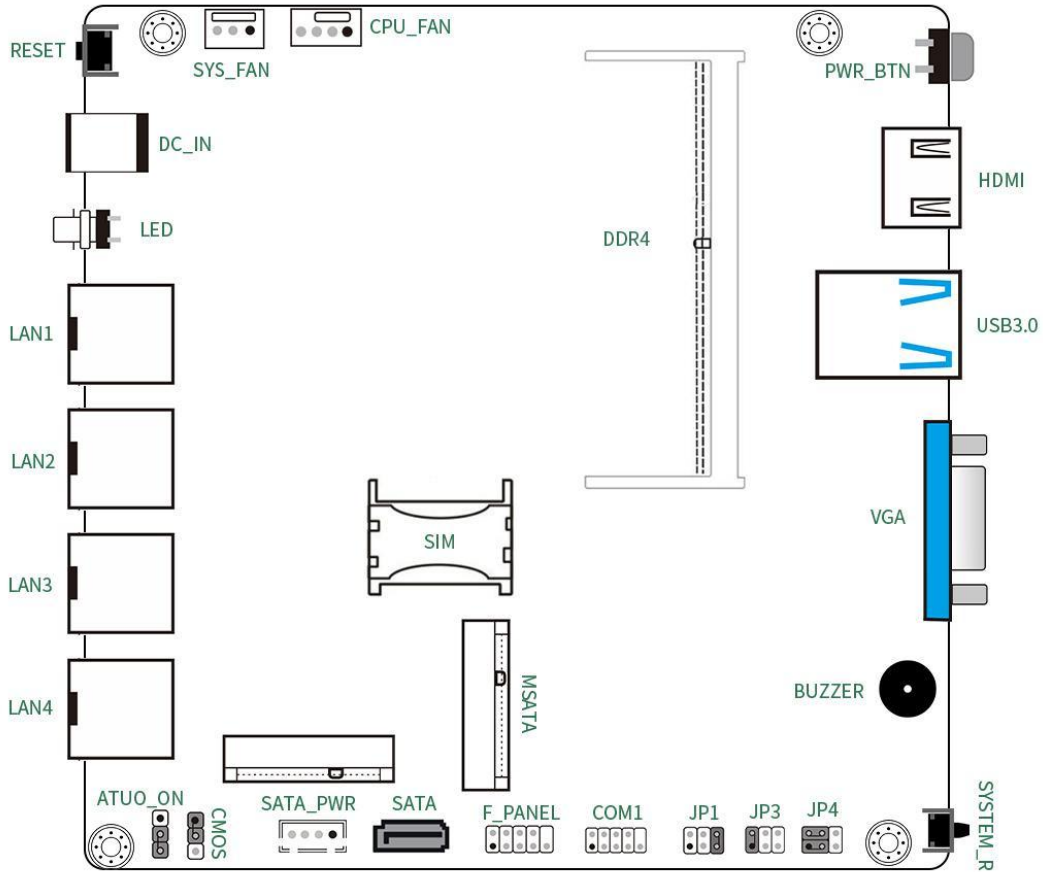

| Item | Describe |
|---------|---|
| SYS_FAN | For Chassis fan power supply |
| CPU_FAN | For CPU fan power supply |
| SIM | SIM Card solt |
| MSATA | Mini SATA SSD solt |
| MPCIE | Mini PCIe solt |
| BUZZER | The buzzer on the mainboard prompts different system status |
| ATOU_ON | Jump cap to enable or disable Auto Power-On |
| CMOS | Jump cap used to restore BIOS mode settings |

| | |
|---------------|--|
| SATA_PWR | SATA HDD/SSD power socket |
| SATA | SATA HDD/SSD data connectors |
| F_PANEL | Motherboard function pin, used to connect chassis button |
| COM 1 | Pins used to expand COM ports |
| JP1, JP3, JP4 | Jumper cap used to switch COM power supply |



| Item | Describe |
|-------|---|
| RESET | Reset Button |
| DC_IN | Power adapter for connecting Jack DC 5.5/2.5mm 12V |
| LED | LED indicator: Green light for power, Red light for hard disk |
| LAN | RJ45 Ethernet port for LAN/WAN Link LED: Green and solid, indicating the network is connected Active LED: Orange flashing, indicating data transmission |



| Item | Describe |
|----------|-------------------------------------|
| SYSTEM_R | System Reset Button |
| VGA | VGA display ports |
| USB 3 | Double-layer USB-Type-A 3.0 port |
| HDMI | HDMI display ports |
| PWR_BTN | Button to turn the device ON or OFF |

Jumper Setting


Before installing the hardware device, you can set the corresponding jumpers according to your needs based on the following table.

To identify the first pin of a jumper or connector

Look at the marking next to the jumper or connector. The triangle symbol "▲" or "1" or a bold line indicates the first pin; check the pad on the back of the motherboard. The square pad is the first pin. When connecting the connector to the device, be careful to distinguish the first pin. Mixing the pins will damage the motherboard.

2-pin headers: Insert a jumper cap into both pins turns them off (short).

3-pin headers: Insert a jumper cap into pins 1-2 or pins 2-3 to off (short) them.

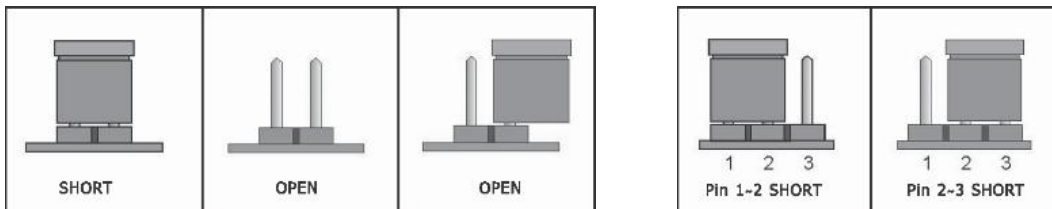

CMOS Content Clear Setting (JCMOS)

| Image | Status | Setting |
|-------|--------|----------------------------------|
| | 1-2 | Normal (Default) |
| | 2-3 | Restore BIOS to default settings |

Before clearing the CMOS, please turn off the device and disconnect the power to avoid damaging the motherboard.


Power-on Jumper (Auto_PWR ON)

| Image | Status | Setting |
|-------|--------|------------------------------|
| | 1-2 | Automatic power on (Default) |
| | 2-3 | Normal |

Motherboard Pin Definition


SATA Data

The motherboard provides 7-pin SATA data socket:

| Image | PIN | Definition | PIN | Definition |
|---|-----|------------|-----|------------|
|  | 1 | GND | 2 | SATA_TXP |
| | 3 | SATA_TXN | 4 | GND |
| | 5 | SATA_RXN | 6 | SATA_RXP |
| | 7 | GND | | - |

SATA PWR


The motherboard provides 4-pin SATA power socket:

| Image | PIN | Definition |
|---|-----|------------|
|  | 1 | +12V |
| | 2 | GND |
| | 3 | GND |
| | 4 | +5V |

Tip: The 1st pin of the SATA_PWR hard disk power supply interface is +12V output, and the 4th pin is +5V output.

Serial Port (COM)


The motherboard provides COM pins (2*5-pin, 2.00 mm pitch, 10th pin is empty)

| Image | PIN | Definition | PIN | Definition |
|---|-----|------------|-----|------------|
|  | 1 | DCD# | 2 | RXD |
| | 3 | TXD | 4 | DTR# |
| | 5 | GND | 6 | DSR# |
| | 7 | RTS# | 8 | CTS# |
| | 9 | RI# | | |

JP1 Settings

The JP1 jumper cap is used to configure COM power settings.


COM_JP1 (2*3-pin, 2.00 mm pitch)

| Image | Status | Definition |
|---|--------|------------|
|  | 1-2 | +5V |
| | 3-4 | +12V |
| | 5-6 | Default |


JP3, JP4 Settings

The JP3 and JP4 jumpers are used to configure the transmission mode of the COM port. Both RS232 and RS485 modes are supported, and you can choose to configure them as needed. The default transmission mode is RS232.

JP3 (1*3-pin, 2.00 mm pitch)

| Image | Status | Definition |
|---|--------|----------------|
|  | 1-2 | RS-232 |
| | 3-4 | RS-485 |
| | 5-6 | RS-485 Enabled |

JP4 (1*3-pin, 2.00 mm pitch)

| Image | Status | Definition |
|--|---------|------------|
|  | 1-3 2-4 | RS-232 |
| | 3-5 4-6 | RS-485 |


Front panel pin: F_PANEL

The motherboard provides F_PANEL pins (2*5-pin, 2.54 mm pitch, 10th pin is empty):

| Image | PIN | Definition | PIN | Definition |
|---|-----|------------|-----|------------|
|  | 1 | HDD_LED+ | 2 | PWR_LED+ |
| | 3 | HDD_LED- | 4 | PWR_LED- |
| | 5 | GND | 6 | PWR_ON |
| | 7 | RESET | 8 | GND |
| | 9 | GND | | |


Processor cooling fan power socket: CPU_FAN

The motherboard provides Cooling fan power socket (1*4-pin)

| Image | PIN | Definition |
|---|-----|------------|
|  | 1 | Ground |
| | 2 | +12V |
| | 3 | FAN_TACH |
| | 4 | FAN_PWM |


System cooling fan power socket: SYS_FAN

The motherboard provides Cooling fan power socket (1*3-pin)

| Image | PIN | Definition |
|---|-----|------------|
|  | 1 | Ground |
| | 2 | +12V |
| | 3 | FAN_TACH |

SIM card slot (SIMB)

The motherboard provides SIM card slot (on the back) for installing an LTE SIM card.



Note: When inserting the SIM card, make sure the chip is facing downwards (the chip faces the motherboard).

BIOS User Guide

BIOS Description

This motherboard uses AMI BIOS. BIOS stands for (Basic Input Output System). It is a set of programs stored on a ROM (Read Only Memory) chip on the computer's motherboard. It stores the computer's most important basic I/O programs, the power-on self-test program, and the system startup program. It can read and write specific information about system settings from the CMOS. Its primary function is to provide the most basic and immediate hardware settings and control for the computer.

When you turn on your computer, the BIOS is the first program to run. It has the following main functions:

- The Power-On Self-Test (POST) checks whether the computer is functioning properly.
- It initializes and tests some external devices and loads your operating system.
- It provides the lowest-level, most basic control of your computer hardware.
- You manage your computer through the SETUP function in the BIOS.

The BIOS data is stored in a CMOS/RAM chip on the motherboard, maintained by a 3.3V button battery. It contains important system information and the BIOS Setup program for setting system parameters. When the system is operating normally, the BIOS does not need to be modified. However, if the CMOS data is lost due to other reasons, the BIOS must be reset.

Note:

Incorrect BIOS settings can directly damage the computer hardware and even burn out the motherboard. Those unfamiliar with the system are advised to modify the settings with caution. Because the motherboard BIOS is constantly being updated, the BIOS information in this manual is for reference only. We cannot guarantee that the BIOS information in this manual will be consistent with the actual BIOS information on the motherboard.

BIOS Settings

When the motherboard is powered on or the system is restarted, the following prompt will appear on the display screen in the Post interface. Press "DEL" on the keyboard to enter BIOS Setup.



If this message disappears before you respond, you can press <Ctrl> + <Alt> + at the same time to restart the computer, or shut down and then restart the computer, or press the power button on the case to restart the computer.

| Keyboard keys | Functional Description |
|---------------|--|
| ← / → | Move the Left and Right arrows to select the screen. |
| ↑ / ↓ | Move the Up and Down arrows to select the item. |
| + / - | Increase/Decrease value or Change selection |
| <Enter> | Select, Confirm this option or Enter the submenu |
| <ESC> | Return to Main page, or End the setup process from Main page |
| <F1> | Show related Help instructions |
| <F2> | Restore previous settings |
| <F9> | Load the optimized settings (BIOS defaults) |
| <F10> | Save the changed settings and reboot |

Common fault analysis and solutions

We have compiled some frequently asked questions for your reference. Please check <https://bkminipc.com/frequently-asked-questions-and-answers/>

| Error | Inspection Method |
|---|---|
| Unable to start after power on | <p>Make sure the power cord is properly connected. Make sure that the power supply you are using meets the power supply requirements of the motherboard. Try to reinsert the Memory Stick. Try to replace the Memory Stick. Try to clear the CMOS of the main board. Please confirm if there is an external expansion card and if it is normal after removing the external card.</p> |
| Unable to display after power on | <p>Make sure the monitor is turned on. Make sure the monitor and host power cables are properly connected. Make sure the monitor and host cables are properly connected. Check to see if the monitor is in "Sleep" mode. Try changing the monitor interface or replacing the monitor.</p> |
| BIOS Setup cannot be saved | <p>Check that the CMOS battery is installed Try to replace the CMOS battery (CR2032) Adjust the time and date in BIOS setup</p> |
| Unable to find a bootable device | <p>Make sure the drive's power and data cables are properly connected. Make sure the operating system is installed on the drive. Make sure the hard drive is not physically damaged.</p> |
| Blue screen or freeze when logging on to the system | <p>Check if the Memory Stick and External Card are loose. Try removing the newly installed hardware and uninstalling the newly installed driver or software. Try replacing the memory with a different specification.</p> |
| Slow entry into the operating system | <p>Check if the CPU cooling fan is running normally. Check if the remaining space of the system partition is insufficient. Use software to check for bad sectors on the hard drive.</p> |
| System restarts automatically | <p>Confirm that the CPU cooling fan is rotating normally. Confirm that the switch/reset button has not been accidentally touched. Confirm that the Memory Stick and external card are loose. Confirm that the power supply has sufficient load capacity, try to replace the power supply Check if the system is infected with viruses.</p> |
| Unable to detect USB device | <p>Confirm that the USB device requires separate power. Confirm that the USB interface has poor contact. Confirm that the USB controller is enabled in the BIOS setup.</p> |

Useful Links

| | | |
|--|---|---|
| Submit your suggestions and ideas in the community | https://www.reddit.com/r/bkminipc/ |  |
| Watch our new product demos | https://www.youtube.com/@BKHD-PCs |  |
| Corporate News and Cooperation | https://www.linkedin.com/company/beikong/ |  |
| Get our latest news on Meta | https://www.facebook.com/people/%E5%80%8D%E6%8E%A7/61558406109357/ |  |